

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/109940 A1

(51) International Patent Classification⁷: **H04B 1/10**

(21) International Application Number:

PCT/IB2003/002184

(22) International Filing Date: 10 June 2003 (10.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEINONEN, Marko** [FI/FI]; Rantapellontie 1C9, FIN-90520 Oulu (FI). **ROUSU, Seppo** [FI/FI]; Sahankuja 1, FIN-90800 Oulu (FI).

(74) Agent: **COHAUSZ & FLORACK (24)**; Bleichstrasse 14, 40211 Düsseldorf (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RECEPTION OF SIGNALS IN A DEVICE COMPRISING A TRANSMITTER

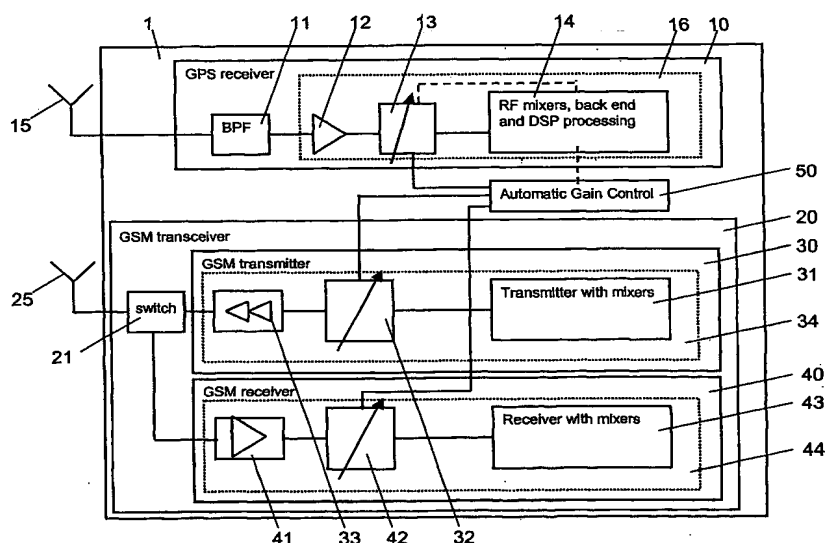

(57) Abstract: The invention relates to a device (1) comprising a communication system transmitter (30) for transmitting signals via a radio interface in a first frequency band. The device further comprises a receiver (10) for receiving signals via a radio interface in a second frequency band. The receiver (10) includes an attenuating component (13) for attenuating signals received by the receiver (10). Moreover, the device comprises a controlling portion (50) setting an attenuation which is applied by the attenuating component (13) to received signals to a higher value, in case the communication system transmitter (30) transmits signals with a power level exceeding a certain value, and setting an attenuation which is applied by the attenuating component (13) to received signals to a lower value, in case no signal is transmitted by the communication system transmitter (30). The invention relates equally to a corresponding method.